



Getting Started

**Installing the Vehicle Kit for your
Sportster 6 Satellite Radio**










Sit. Stay. Have fun.

Thanks for giving your Sportster 6 a good home. You're probably anxious to get started.

Before you decide to install this kit yourself, we'd like to suggest getting a pro to help. We want you to be 100% satisfied with your satellite radio experience. Just visit your local retailer for installation, or visit sirius.ca to learn more.

Here's a simple guide for those who prefer doing this kind of stuff themselves. For more detailed info, check out your User Guide or click the **"INSTALL + ACTIVATE"** link on our homepage.

Take your radio out of the box.
You should have these.

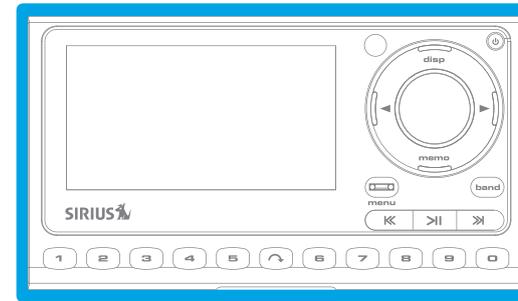

- a. radio
- b. remote
- c. PowerConnect vehicle dock
- d. windshield mount
- e. vent mount
- f. antenna
- g. antenna cover / tail
- h. PowerConnect power adaptor
- i. screws
- j. alcohol pads
- k. aux in cable

1

The big decision. Pick a spot for your radio. Air vent or windshield?

A. Attach the mount to vehicle dock.




Using the screws provided, attach the vehicle dock to the vent mount.

B. Attach to vent.

If the vent louvers in your vehicle are recessed, you may need to use the longer vent hooks with the vent mount. Be sure to match the orientation of the vent hooks as shown. Position the two tension springs against a heating / AC vent louver. Then gently push the vent mount into the vent, far enough so that the hooks drop down and hook the rear of the vent louver. Once the hooks have grasped a vent louver, the tension springs will keep the vent mount hooked to the louver. Use support foot to brace the radio in place.



Refer to page 15 in the User Guide if you prefer more detailed instructions.

AIR VENT

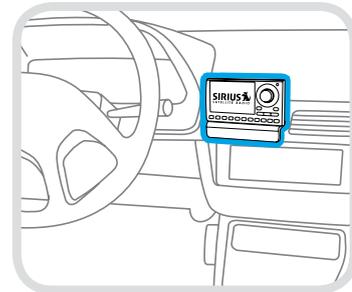

To change the angle of the vehicle dock, move the foot to a different adjustment hole on the vent mount.

WINDSHIELD



BE SAFE: Make sure your radio isn't in a place where it could interfere with driver visibility or safe deployment of the airbags.



BE SMART: Additional vehicle installation accessories are available at your satellite radio retailer or visit sirius.ca for more information.

Radio mount placement options for windshield.

Windshield mounting is an alternate method. Refer to the User Guide for details.

2

You'll be glad you did this right. Place your magnetic antenna and hide those wires.



Here are some general guidelines. For more tips and details, checkout your User Guide or go to sirius.ca.

A. Placing the antenna outside.


Leave at least 3" of metal around the antenna. Use the rubber tail cover to hide and protect the exposed wire. Feed the wire under the rubber molding around the back windshield, into the seal around the trunk. Route the cable along trunk wall and into the interior cabin from there.

B. Hiding the antenna wire inside.

The best place to hide your antenna wire depends on your vehicle. It's usually easiest to run the wire from the rear of the vehicle to the front toward the radio by routing the cable along the interior trim where it meets the carpet, by gently pushing it behind the edges of the trim. Then bring the cable out from trim and route under carpet to dashboard or console. Plug cable into the radio and coil extra wire under carpet or floor mat.

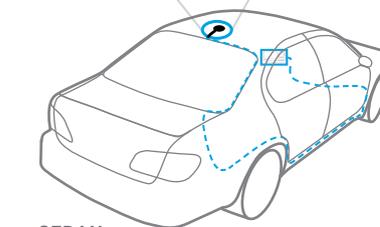

SEDAN

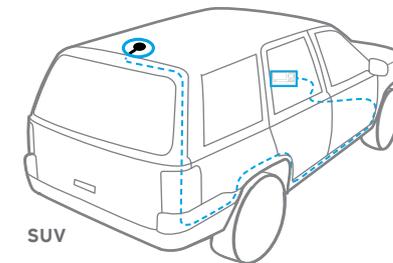

SUV



BE CAREFUL: STOP and read the more detailed instructions – or get a pro to help. If you don't understand what to do next, You might accidentally do damage to your ride.



BE SAFE: Not properly placing or installing the antenna can create safety hazards during an accident.



BE SMART: A dry car is nice. Avoid damaging or compromising the window and trunk seals.



BE SMART: Use a tool like a blunt plastic putty knife to help hide wires along the trim.

Antenna placement options for other vehicles.

PICKUP TRUCK
Above front windshield, on the roof toward front of cab. Centered between right and left sides.



CONVERTIBLE
On trunk lid, at least 3" from seam. Centered between right and left sides.

3

Almost there. Connect the audio to your car stereo.



BE SMART:
Other options,
- like a direct
FM connection
or rear Auxiliary
Input - may give
you better audio
quality, but may
require pro
installation.

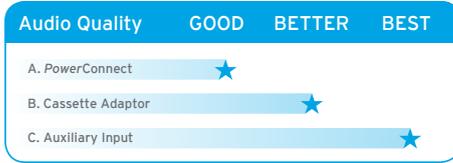

First, power up.

Plug in your *PowerConnect* Power Adapter. This goes into your cigarette lighter. Now, choose either A, B or C below.

OPTION A *PowerConnect*

Select an FM station on your radio that is not in use – you should only hear static. (Visit sirius.ca/en/install/frequency.aspx to find available stations in your area.) Turn on Sportster and press and hold the **FM Preset/Menu button**  for 2 seconds to access the menu. Scroll to FM Transmitter and press the Select knob. Scroll to FM Presets and press the Select knob. Then choose FM Preset 1-5 to program and match the same FM station as your car radio.

OPTION B *Cassette Adaptor*


Sold separately.

OPTION C *Input Jack (Aux / Line In)*

Found in some newer vehicles.

4

Nice job. Now just get your ID and subscribe!



Test your radio and get its ID.

Please turn to channel #184 to make sure your radio is getting signal and sound. Now find the 12 digit SIRIUS ID number on the bottom of the box or by selecting:

Power > Menu > SIRIUS ID (or) channel #0

Activate your radio.

Subscribe online: activate.sirius.ca

(or) subscribe by phone: **1.888.539.7474**



sirius.ca

SIRIUS Canada Inc.
135 Liberty St. – 4th floor
Toronto, Ontario, M6K 1A7
888.539.SIRIUS (7474)

© 2010 SIRIUS Satellite Radio Inc. "SIRIUS" and the SIRIUS dog logo, channel names and logos and related marks are trademarks of SIRIUS Satellite Radio Inc. Radio and subscription required and sold separately. All rights reserved.